


E-TON 2009 SCOOTER DELUXE LUGGAGE BOX INSTALLATION



LUGGAGE BOX PACKAGE CONTENTS

- One (1) luggage box
- One (1) mounting board
- Four (4) Philips-head bolts
- Four (4) nuts
- Four (4) fixing plates

**MAX LOAD
7 lbs.**

REAR RACK INSTALLATION (2009 Matrix Scooters Only)

➔ Before installing the luggage box on the 2009 Matrix 50 and Matrix R4-150 scooters, the rear trim must be replaced with a mountable Rear Rack (Part # 813857). If you have a scooter other than one of these, skip ahead to STEP 3.

- **STEP 1**—Remove the rear trim piece from the vehicle by removing the three bolts shown in the picture. It is the silver plastic piece that curves around the back of the scooter.
- **STEP 2**—Install the new rear rack by positioning it on the back of the vehicle and reinstalling the three bolts removed before as shown in the picture. Be sure to insert the two spacers under the front of the rack as shown in the picture.




SPACER



MOUNTING BOARD ASSEMBLY

For scooter with an OPEN RACK as shown in drawing:

- ➔**
- **STEP 3**—Install the mounting board onto the rack with the locking bar facing to the back.
 - Install the four Philips-head bolts through the mounting board. Refer to the photo below. **Layout may be different for some scooters. If so, find a suitable alignment of the bolts.**

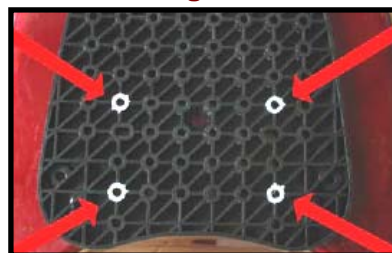

Continued ➔

E-TON 2009 SCOOTER DELUXE LUGGAGE BOX INSTALLATION





- ➔ **STEP 4**—Arrange the four fixing plates onto each bolt from beneath the mounting plate so that the curved ends fit around portions of the rack as shown. Align the box as needed, then affix nuts to the end of each bolt and tighten them to hold the assembly in place. **CONTINUE TO STEP 5.**



For scooter with a CLOSED RACK as shown in A:

- ➔ **STEP 3**—Install the mounting board onto the rack with the locking bar facing to the back.
- Install the four Philips-head bolts through the mounting board as shown in figure B.
- Install nuts onto the ends of each bolt and tighten as shown in C. **NOTE:** It is recommended to install washers onto the rear two bolts before attaching the nuts.

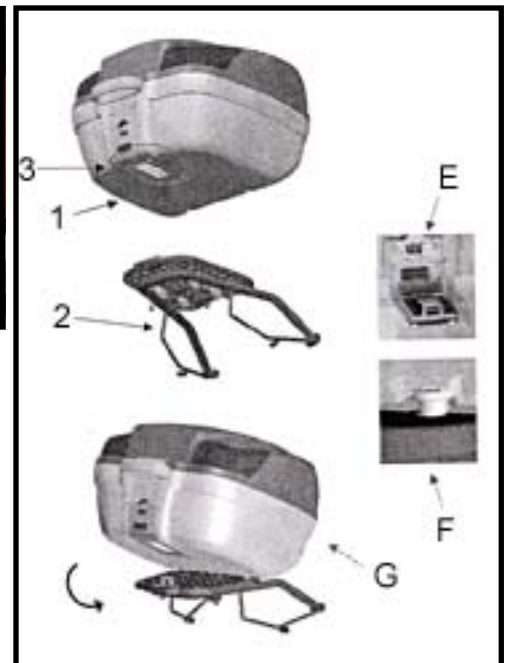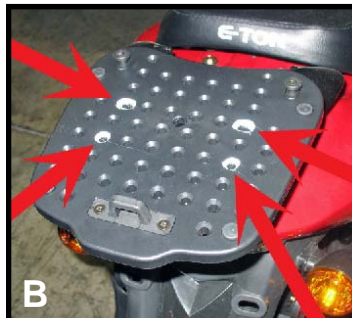

INSTALLING/REMOVING THE BOX

- ➔ **STEP 5**—To install the box onto the mounting plate, line the grooves on the back of the box with the pins on the mounting plate as shown in D. Slide the box onto the pins, then push it down so that it locks in to place.
- To remove the box from the mounting plate, press and hold the red button on the front of the box, then gently lift the box and pull it backward off the locking pins.
- **NOTE:** If the incorrect combination is set, the red button will be locked and the box cannot be removed. See the next page for more information.



Continued ➔

E-TON 2009 SCOOTER

DELUXE LUGGAGE BOX INSTALLATION

SETTING THE COMBINATION LOCK



The default combination is “000”. Use this combination to open the box until another combination is set.

1) Open the luggage box.



2) Look inside of the box for the location shown in the picture. You will find four bolts that hold the front panel in place, as well as a small metal lever (circled in the photograph).



3) Push the lever into the “up” position as demonstrated in the photograph.



4) On the outside front of the box, turn the numbers on the combination lock to set your preferred combination.



5) When you have set the combination you prefer, flip the lever on the inside back into the “down” position to secure the combination. The next time you want to open the box, you will need to make sure the combination is correct.

**Always take all valuables with you when you leave.
Never leave anything valuable inside of the box.**